



PRODUCT DETAILS

The SAP42DF guardrail is engineered for existing concrete structures and provides a 5000 lb point of tie-off. Meets OSHA height requirements. Made in the United States with heavy-duty steel, this guardrail system can be reused time over time.

Installation: Drill (4) holes to match holes on baseplate and then fasten with (4) 4" HD Titan Concrete Anchors.

FEATURES

- Dedicated D-ring 5000 lb tie-off
- 360° Rotation D-ring follows the worker
- Fixed non rotating ear brackets with vise clamping
- Braced base plate for maximum support
- Surface thread mount anywhere

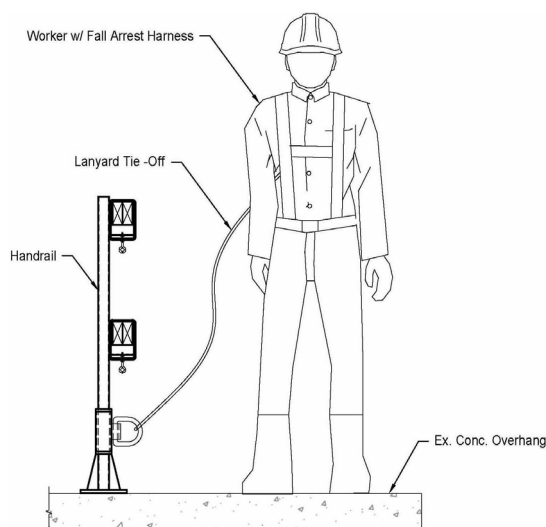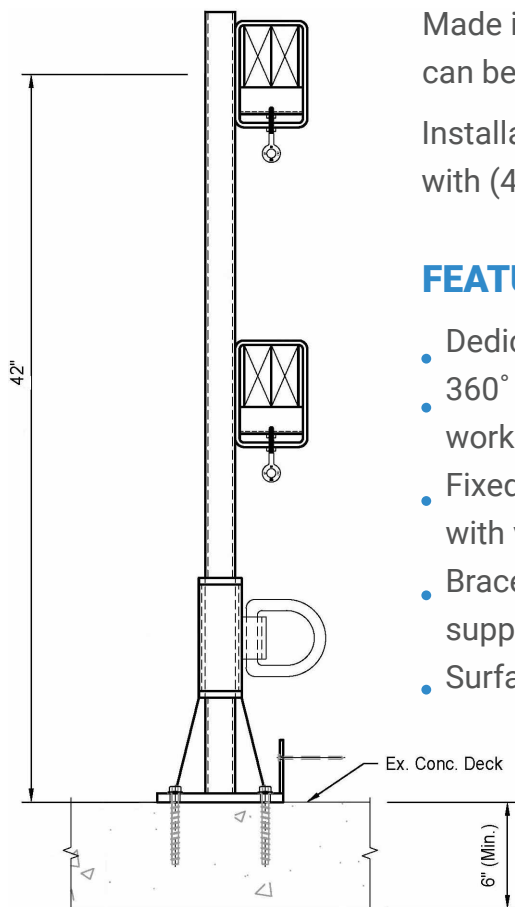

PART NO.	SIZE	DESCRIPTION
SAP42DF	3' 8.5" H	42 Inch Guardrail with D-Ring 5000 lb point of tie-off