


PRODUCT DETAILS

The SAPS guardrail for concrete applications attaches to an embedded anchor and provides a 5000 lb point of tie-off. The 42 inch and 60 inch models meet OSHA height requirements.

Made in the United States with heavy-duty steel, this guardrail system can be reused time over time. Installs in under a minute without the need for any tools.

FEATURES

- Permanent D-ring 5000 lb tie-off
- Rotatable rail member brackets with vise clamping
- Braced base plate for maximum support
- Use with SAPS Spider Anchor or SAPS Dualie Anchor®

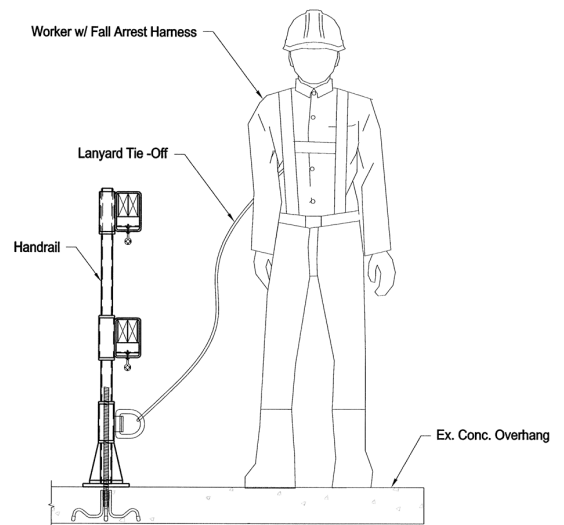

PART NO.	SIZE	DESCRIPTION
SAP21D	2' 0.5" H	21 Inch Guardrail with D-Ring 5000 lb point of tie-off
SAP42D	3' 9.5" H	42 Inch Guardrail with D-Ring 5000 lb point of tie-off
SAP60D	5' 3.5" H	60 Inch Guardrail with D-Ring 5000 lb point of tie-off
SAPS Spider Anchor	6" - 24" H	Guardrail anchor embed
SAPS Dualie Anchor®	5" - 24" H	Guardrail dual anchor embed
SAPS Toeboard 10 Inch	10" W x 10" D	Toeboard attachment for SAP21D & SAP42D
SAPS Toeboard 14 Inch	14" W x 14" D	Toeboard attachment for SAP60D